



BUTLERIB® II EX™ WALL SYSTEM

If you are looking for a cost-effective, energy-efficient alternative to insulated metal panels, this system has been rigorously tested for thermal performance, ease-of-installation and long-term durability.


KEY BENEFITS

- **Reduced Installed Cost**
30–40% savings compared to insulated metal panels.
- **Energy Efficiency**
Tested U-factors as low as 0.047 and R-values of 21.2 support reduced energy use.
- **Faster Installation**
Lightweight components and fewer handling needs streamline installation.
- **Energy Code Compliance**
Meets IECC and ASHRAE requirements using standard fiberglass insulation.



PRODUCT FEATURES

- 1. Exclusive 6' Stanchion System**
Creates larger insulation cavities without compressing the insulation.
- 2. Integrated Air/Vapor Barrier**
<0.1 perms permeability rating helps maintain insulation integrity and thermal performance.
- 3. Scrubolt™ Fasteners Capability**
Delivers increased wind and suction resistance.

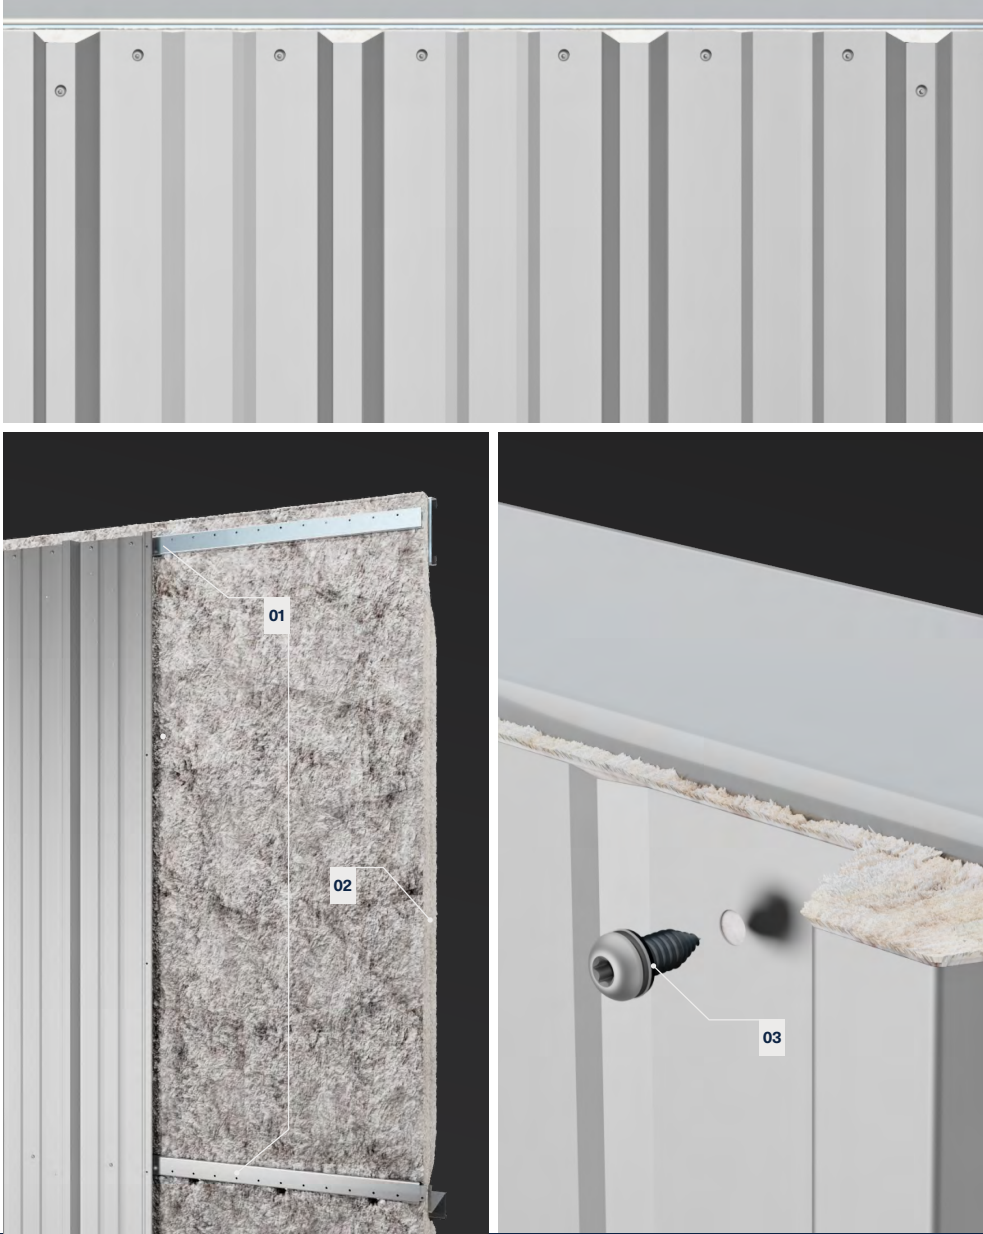

SPECIFICATIONS

Panel Type	Butler II Wall System with stanchions
Panel Profile	12" O.C. 1½" Roll Form Corrugation
Panel Width	36"
Panel Gauges	24 and 26-gauge steel
Fastener Type	Exposed
Finish Options	Butler-Cote™ finish system
Insulation Options	Fiberglass blanket
Maximum Insulation Thickness	8"
Lowest Tested U-Factor	0.047
Warranty	25-year Butler-Cote finish warranty



BUTLERMFG.COM

