




STYLWALL® II FLAT WALL SYSTEM

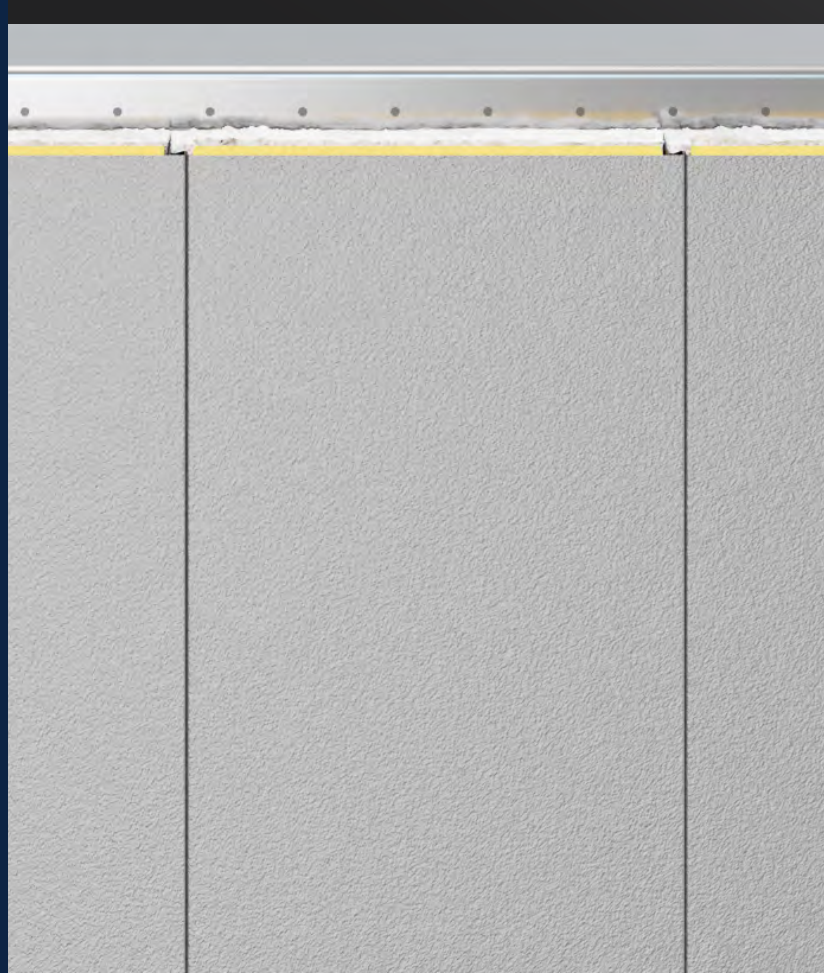

This wall brings calm to the exterior of the building. Its smooth, uninterrupted surface allows the architecture to speak clearly, without distraction, creating a presence that feels intentional. Behind that clean expression is a system built to perform day after day helping manage energy, protect the structure and maintain its integrity over time. Consistency in the system supports a more predictable path from design through installation, reducing uncertainty and reinforcing confidence in the final result. Integrated as part of a coordinated envelope, it works in concert with the rest of the building to deliver lasting performance.


The outcome is an exterior that looks right, performs reliably and continues to reflect quality long after the project is complete.

KEY BENEFITS

- **Refined Exterior Presence**
Reinforces the building's visual intent and elevates its overall impression.
- **Improved Interior Comfort**
Supports more stable interior conditions by helping manage heat transfer across the wall system.
- **Predictable execution**
Reduces variability and supports a cleaner finished result.
- **Lasting exterior integrity**
Helps the building retain its appearance and performance over time.

PRODUCT FEATURES

- 1. Flat-Panel Profile**
A smooth exterior surface with concealed fasteners provides a clean, uniform wall appearance.
- 2. Factory-Formed Construction**
Consistent panel geometry ensures precise fit and controlled quality during installation.
- 3. Galvanized Steel Panel**
High-strength galvanized steel with durable coatings provides long-term exterior performance.
- 4. System-Wide Compatibility**
Engineered to integrate with Butler wall and roof systems for coordinated envelope performance.
- 5. Concealed Fastener System**
Hidden attachments support clean exterior appearance.

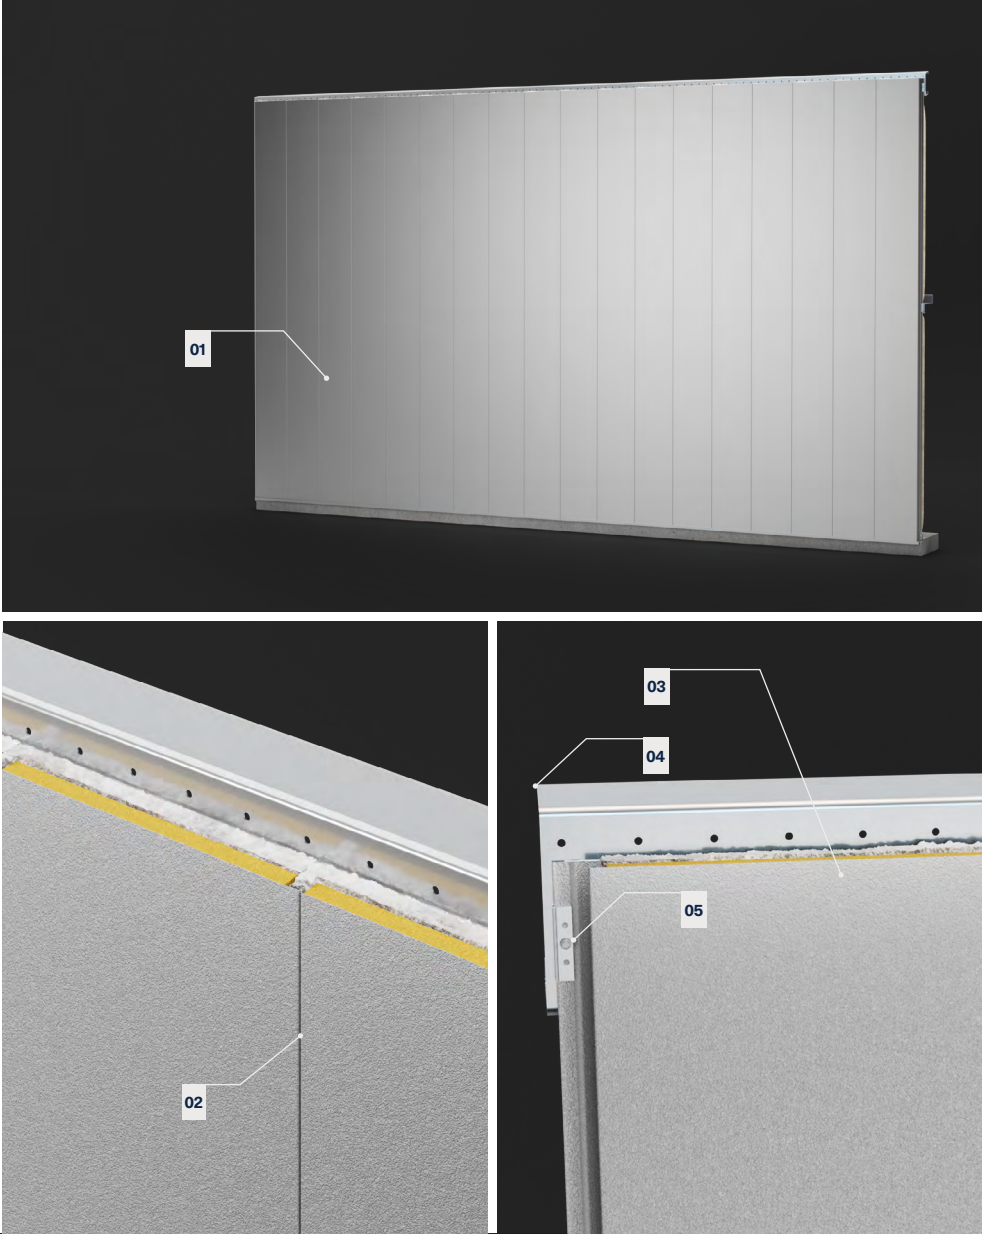

SPECIFICATIONS

Panel Type	Flat embossed concealed-fastener panel
Panel Profile	Flat embossed panel
Panel Width	16"
Panel Gauges	26-gauge steel
Fastener Type	Concealed
Finish Options	Butler-Cote™ finish system
Insulation Options	Fiberglass blanket
Maximum Insulation Thickness	6"
Lowest Tested U-Factor	0.06
Warranty	25-year Butler-Cote finish warranty



BUTLERMFG.COM

